




Willis, Texas
 Ph.936 856 1704
 www.ChemtecEnergy.com
 Made In USA
 38-300084

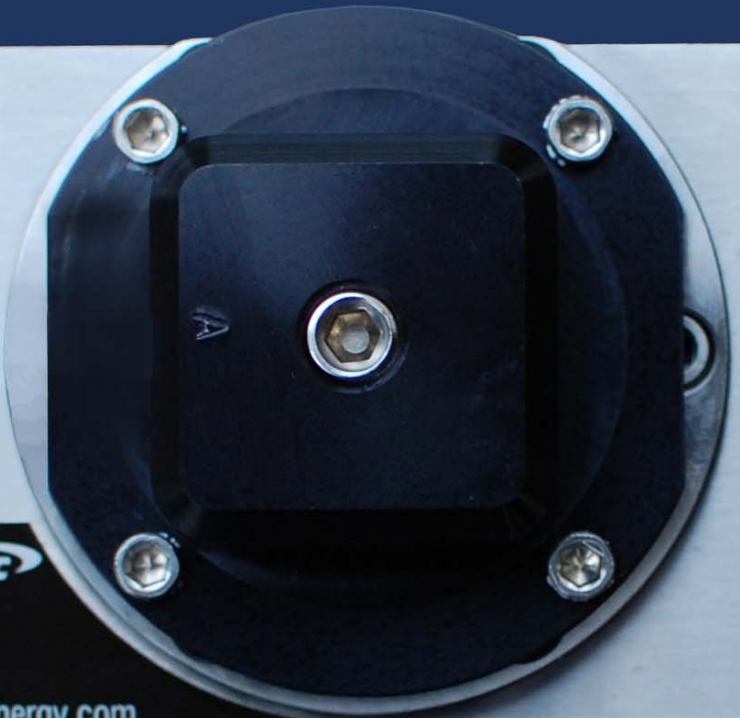

MiniBLOCK 7738 v4

ASCO® Red-Hat II®
 ENCLOSURE TYPES 3, 3S, 4, 4X, 5, 6P, 7, & 9
 CAUTION: TO PREVENT FIRE OR EXPLOSION, DO NOT INSTALL WHERE IGNITION TEMPERATURE OF HAZARDOUS ATMOSPHERE IS LESS THAN 165 °C. OPEN CIRCUIT BEFORE DISASSEMBLING. FOR USE IN HAZARDOUS LOCATIONS SEE LISTING OR A, B, C, D, E, II, DIAL I, OR E, F, & G.

REBUILD KIT NO. _____ ATTENTION: NE PAS OUVRIR SOUS TENSION

AIR, INERT GAS (PSI)	OLENROID CATA. NO.
WATER (PSI)	EF8003G2
LT. OIL (PSI)	WATTS
	17.1
	PIPE
SERIAL NO.	DATE
T219543	0934
VALVE CATALOG NO.	EFX8003G00221327

www.ascovalve.com
 FLORENNA PARK, N.J., U.S.A.
 APPROVED FOR INSTALLATION



INLET